



ARLON

PRODUCT CATALOGUE



Your Partner of Choice

Arlon, established in 1958 near Los Angeles, California, is a leading global manufacturer of pressure-sensitive adhesive vinyls for the sign and graphics industry.

As one of the world's most experienced casting companies, Arlon has gained a worldwide reputation for quality and innovation.



WRAPITRIGHT.COM

WrapItRight.com gives you access to expert advice and tutorials from industry leaders and specialists!

- ▶ How-to video library featuring vehicle wraps, commercial signage, and digital printing techniques.
- ▶ Create custom playlists and watch videos later.
- ▶ Get updates on Trade Shows and Training Events.

Throughout this brochure you will see companion how-to videos featuring recommended methods and techniques. Videos can be accessed by using the QR code or visiting wrapitright.com.




**PRODUCT
Questions?**

WE'RE HERE

EUROPE CUSTOMER SERVICE:

 ArlonEuropeCS@arlon.com

 Head Office: +31 70 354 4311

*Arlon is proudly ISO
9001:2015 certified.*






Table of Contents

At-a-Glance Products Chart	4
Benefits of FLITE Technology®	6
Vehicle Films	10
Architectural Range	18
•Interior Wall Films	20
•Exterior Wall Films	22
•Window Films	24
•Floor Films	26
Commercial Films	32
Overlaminates	38

CATEGORY						NAME	DURABILITY UNPRINTED (IN YEARS)	FILM					ADHESIVE					SURFACES						INK				
VEHICLE FILMS	INTERIOR WALL FILMS	EXTERIOR WALL FILMS	WINDOW FILMS	FLOOR FILMS	COMMERCIAL FILMS			TYPE	THICKNESS (IN MICRONS)	FINISH	FLITE TECHNOLOGY®	X-SCAPE TECHNOLOGY®	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	SOLVENTS	UV
●						PREMIUM COLOUR CHANGE	10*	C	76-84	G/M S	●				●	C/G/W/S	●	●	●	●	●		●	●		N/A	N/A	N/A
●						SLX+®	10	C	50	G	●				●	LG	●	●	●	●	●		●	●		●	●	hp
●						SLX™ CAST WRAP	10	C	50	G	●				●	LG	●	●	●	●	●		●	●		●	●	hp
●						DPF 6100XLP	10	C	50	G		●			●	LG	●	●	●	●	●		●	●		●	●	hp
●					●	DPF 6000XRP	10	C	50	G		●			●	LG	●	●	●	●	●		●	●		●	●	hp
●					●	DPF 6000RP WHITE	10	C	50	G		●			●	LG	●	●	●	●	●		●	●		●	●	hp
●					●	DPF 6000RP CLEAR	7	C	50	G		●				C	●	●	●	●	●		●	●		●	●	●
●						FUSION WRAP	7	P	60	G	●				●	LG	●	●	●		●		●	●		●	●	hp
●				●	●	DPF 4600GLX	7	P	80	G		●		●	●	LG	●	●	●	●	●		●	●		●	●	hp
●						ILLUMINITE WRAP™	7	C	125	G	●				●	LG	●	●	●				●	●		●	●	hp
●						DPF 2400XLP	7	C	125	G		●			●	LG	●	●	●				●	●		●	●	hp
●					●	DPF 2400	7	C	125	G		●				C	●	●					●	●		●	●	
●		●		●	●	DPF 8000™ ULTRA TACK WHITE	7	P	90	S		●			●	■	C	●	●			●	●		●	●	●	hp
●						DPF 4550GTX/MTX	5	P	70	G/M		●			●	LG	●						●	●		●	●	●
●						DPF 4550GT/MT	5	P	70	G/M		●				LG	●						●	●		●	●	●
●						DPF 4550G	5	P	70	G		●				C	●						●	●		●	●	●
●						DPF 4200	7	P	150	M/C		●			●	C	●	●			●		●	●		●	●	hp
●						DPF 4300	4	P	86	M			●		●	C	●						●	●		●	●	●
●					●	DPF 510 ULTRA TACK	3	M	100	G/M		●			●	C/LG	●						●	●		●	●	●
						DPF 8000™ ULTRA TACK CLEAR	7	P	75	L		●			●	C	●	●			●	●		●	●		●	●
					●	DPF 8200 HIGH TACK	7	P	90	S		●			●	C	●	●			●	●		●	●		●	hp
					●	DPF 8200X HIGH TACK	7	P	90	S		●			●	C	●	●			●	●		●	●		●	hp
					●	DPF 5450X	5/3▼	P	80	EG		●			●	C	●						●	●		●	●	●
					●	SERIES 5400	5/2▼	P	80	M		●				C	●						●	●		N/A	N/A	N/A
					●	DPF 50WD WHITE/CLEAR	2/1▼	P	90/100	G/M			●		●	C	●						●	●		●	●	●
					●	DPF 45WF	1	M	150	S			●		●	C	●						●	●		●	●	●
					●	DPF 510G/M	3	M	100	G/M		●				C	●						●	●		●	●	●
					●	DPF 510GTR/MTR	3	M	100	G/M			●			LG	●						●	●		●	●	●
					●	DPF 510GT/MT	3	M	100	G/M		●				LG	●						●	●		●	●	●

CATEGORY	NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE						SURFACES						INK			
			TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	SOLVENTS	UV
OVERLAMINATES	SERIES 3170	7	C	35	G	●					C	●	●	●			●	●	N/A	N/A	N/A
	SERIES 3200	7	C	50	G	●					C	●	●	●	●		●	●	N/A	N/A	N/A
	SERIES 3210	7	C	35	G	●					C	●	●	●	●		●	●	N/A	N/A	N/A
	SERIES 3220	7	C	50	G/M	●					C	●	●	●	●		●	●	N/A	N/A	N/A
	SERIES 3270	7	C	50	G/M	●					C	●	●	●	●		●	●	N/A	N/A	N/A
	SERIES 3310 	10	PU	38	G	●					C	●	●	●	●		●	●	N/A	N/A	N/A
	SERIES 3420	5	P	75	G/M/S	●					C	●					●	●	N/A	N/A	N/A
	SERIES 3450	5	P	80	G/M	●					C	●					●	●	N/A	N/A	N/A
	SERIES 3510	3	M	80	G/M	●					C	●					●	●	N/A	N/A	N/A
	SERIES 3350	10	PVDF	50	S	●					C	●					●	●	N/A	N/A	N/A
	PROTEC SERIES 3960	2	M	305	G	●					C	●	●				●	●	N/A	N/A	N/A

ARLON DICTIONARY:

Permanent Adhesives: Designed for short, medium and long-term applications. May need heat and/or chemicals to be removed.

Removable Adhesives: Designed for short-term applications. Can be removed without heat or chemicals, with little or no adhesive left behind.

Clean Removing Adhesives: An added feature of some permanent adhesives. Up to 30% of adhesive may stay behind during film removal.

Air-Egress: Air channels in the adhesive that allows air to release when bubbles are formed. Helps for an easier installation. The adhesive used could be permanent or removable.

CHART CAPTION:

DURABILITY:

▼ Years durability for outdoor applications

* Premium Colour Change is rated for an outdoor durability of up to 10 years. For additional details, please see Arlon's Warranty

TYPES:

C: Cast **P:** Polymeric **M:** Monomeric **PU:** Polyurethane **PVDF:** Polyvinylidene fluoride (PVC free) **PP:** Polypropylene **PL:** Polyester

FINISHES:

G: Gloss finish **M:** Matte finish **S:** Satin finish **L:** Luster **EG:** Etched glass finish **P:** Pebble finish **C:** Canvas

TECHNOLOGIES:

FLITE Technology®:  **X-Scape Technology®:** 

CLEAN REMOVING:

♣: Clean removing is only for vehicle applications

ADHESIVES:

■: Available for special order, please refer to your Arlon Business Development Manager **LG:** Light Grey Adhesive **C:** Clear Adhesive **G:** Grey Adhesive **W:** White Adhesive **S:** Silver Adhesive

SURFACES:

♣: Only with overlaminate Series 3170

INKS:

Solvent: Printable with solvent and eco-solvent inks **Latex:** The logo  means the film is certified for HP Latex Inks

OVERLAMINATES (in the catalog):

★: Recommended overlaminate

PVC FREE:

 Environmentally Friendly

HOW DOES YOUR BUSINESS BENEFIT FROM **FLITE TECHNOLOGY®?**



FLITE[®]
TECHNOLOGY

FLITE Technology[®] is a lite contact, repositionable system based on a unique adhesive and liner combination. An installer will experience the easiest to apply products in the market.

**MORE
INFO**



25% FASTER

FLITE Technology[®] wrap films allow you to get a vehicle wrapped up to 25% faster compared to other films. Applications on flat surfaces can be done even up to 40-50% faster!

A REAL MONEY-SAVER

Finishing applications faster means more vehicles wrapped in the same time. FLITE Technology[®] saves a lot of time per vehicle: reduced labor costs will enable your business to thrive.

FLITE Technology[®] wrap films offer:

- ▶ Superior Repositionability
- ▶ Vibrant & Reliable Print Quality
- ▶ Long Term Bond
- ▶ High Durability
- ▶ Easy & Clean Removability

IMPRESS YOUR CUSTOMERS

With FLITE Technology[®] wrap films you save time and money, which allows you to lower the costs and offer more competitive pricing to your customers. Your customers will love the precise, vibrant graphics and when it comes to removing the film again you will love the easy and clean removability. The wrapping process will have increased efficiency and amongst other reduce the downtime of fleet which your clients will highly value!

MAXIMUM PRECISION

No more frustration when the graphics need to be repositioned on the vehicle! Applied areas of FLITE Technology[®] wrap films can be lifted again and again for repositioning until the graphics are precisely in the right place! Once the graphics are in the right place they will stay put, even in deep channels and complex curves.

IT TAKES ONLY ONE

The effortless removal of the liner of FLITE Technology[®] films reveals the light grey opaque adhesive. The adhesive is non-static, thus does not attract dust and enables to work with larger pieces of vinyls without fearing to get dust on the adhesive. As the squeegee smoothly slides over the vinyl, the wrinkles and bubbles can be pushed out with ease. The ease of application makes it possible for one wrapper to wrap a vehicle!

“Thanks to FLITE Technology[®] we can work faster because the film slides so easily over larger shapes. The application time is improved and really more efficient on large surfaces such as heavy trucks. On top of that, we see a superb print quality.”

Féroce Graphics, France



SLX[®]

A PERFORMANCE EVOLUTION



EQUIPPED WITH

FLITE[™]
TECHNOLOGY

ALL-SEASON DIGITAL PRINT CAST FILM WITH OUTSTANDING FEATURES

VIBRANT AND RELIABLE PRINT QUALITY

IMPROVED CUTTING AND WEEDING

EFFORTLESS LINER RELEASE

HIGH-PERFORMANCE LINER

STATIC-FREE ADHESIVE CONSTRUCTION

ULTRA-REPOSITIONABLE

FAST ADHESIVE BOND

SUPERIOR DIMENSIONAL STABILITY

NO ADHESIVE TO ADHESIVE DELAMINATION

REMARKABLE RECOVERY PROPERTIES

OUTSTANDING HEAT RESISTANCE

STAYS IN DEEP CHANNELS

EXCELLENT BOND TO STAINLESS STEEL

FIRST IN CLASS CLEAN REMOVING



PREMIUM COLOUR CHANGE



ARLON

FLITE[®]
TECHNOLOGY

Premium Colour Change is your ideal choice for automotive restyling and fleet applications. The conformable cast film features FLITE Technology[®] for fast, easy installation, excellent repositioning and clean removability. The engineered liner with invisible air channels gives bubble-free application resulting in an ultra-smooth finish for full and partial vehicle wraps. The specially adapted protective film on gloss colours ensures the highest gloss level. Guaranteed to stay down in deep channels, curves, recesses and the most complicated shapes.

Premium Colour Change eye-catching colours are available in **gloss, matte and satin finishes.**

Ultra Gloss Levels



Self-Healing Adhesive



DAY OF THE WRAP

DAY 10 AFTER WRAP

Vehicles wrapped by NeedForWraps.com

COLOUR *IN MOTION*



403
Gloss Black




401
Gloss Red




411
*Gloss Silver
Metallic*




503
Matte Black




551
*Matte
Aluminium Red*



412
Gloss Light Grey




453
Satin Black



554
*Matte Aluminium
Black Rose*



505
Matte Grey




404
*Gloss Black
Metallic*



557
*Matte Aluminium
Purple*



413
Gloss Grey



402
Gloss White



408
Gloss Blue Grey



558
*Matte Aluminium
Grey*



452
Satin White



555
*Matte Aluminium
Blue*



454
*Satin Charcoal
Metallic*



455
*Satin
Pearl White*




405
*Gloss
Pearl White*

PLEASE NOTE:


To see the actual colours please use the physical Arlon Premium Colour Change swatch.



Application Tips

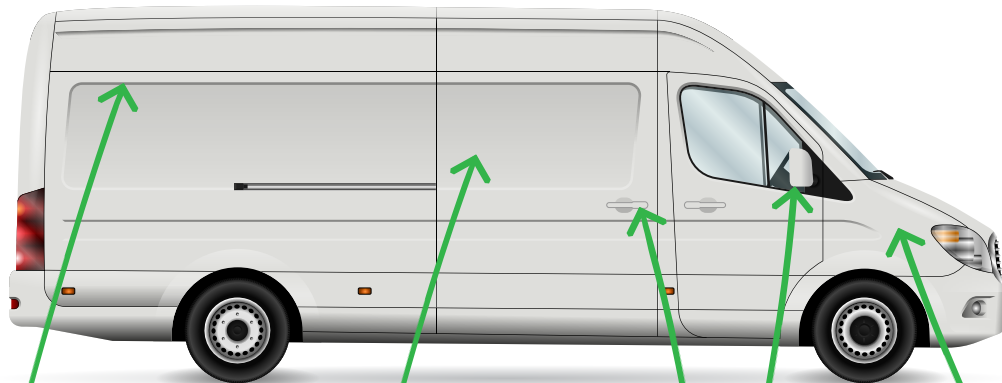

Deep Channel




Concave corrugations with a sharp angle on the bottom. Usually on a side and rear of cargo vans

Flat



Flat doors, trucks sides and rears

Compound Curve




Painted mirrors, bumpers, handles, etc.

Soft Curve



Hoods, fenders, etc.


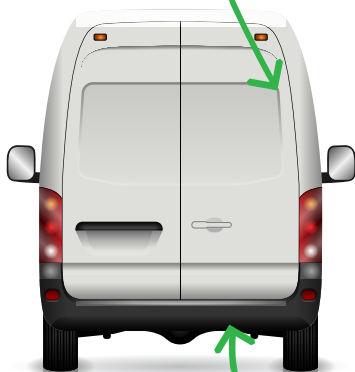


Low Energy Surface

<38 dyne



Unpainted plastics, rubbers, etc.

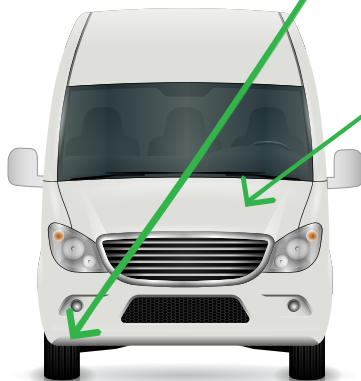

Textured



Painted skirts

Vehicle Categories



Flat truck

Surfaces	Recommended Products
Without rivets: • Flat panels on the sides and/or on the rear. • Smooth surfaces	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX DPF 2400XLP / DPF 2400 DPF 4550GTX/MTX DPF 4550GT/MT DPF 4550G



Car

Surfaces	Recommended Products
• No deep channels • Smooth surfaces	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Cargo van

Surfaces	Recommended Products
• Deep channels on the sides and/or on the rear	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR



Passenger van

Surfaces	Recommended Products
• No deep channels • Windows on the sides and/or on the rear	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Bus

Surfaces	Recommended Products
• No deep channels • Smooth surfaces	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Train & Tram

Surfaces	Recommended Products
• No deep channels • Smooth surfaces	Premium Colour Change SLX+® SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™

Choose your Vinyl

For more product information [click here:](#)









NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS		
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS		TEXTURED	LOW ENERGY SURFACES
PREMIUM COLOUR CHANGE FLITE TECHNOLOGY	10*	C	76-84	G/M/S	●		●		●	G/C/ W/S	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
SLX+® FLITE TECHNOLOGY	10	C	50	G	●		●		●	LG	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
SLX™ CAST WRAP FLITE TECHNOLOGY	10	C	50	G	●		●		●	LG	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6100XLP X-Scape TECHNOLOGY	10	C	50	G	●		●		●	LG	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000XRP X-Scape TECHNOLOGY	10	C	50	G	●		●		●	LG	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000RP WHITE	10	C	50	G	●		●			LG	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains ▶ - Trams
DPF 6000RP CLEAR	7	C	50	G	●					C	●	●	●	●	●		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
FUSION WRAP FLITE TECHNOLOGY	7	P	60	G	●		●		●	LG	●	●	●		●		Flat trucks Cars Passenger vans Buses Trains - Trams

* Premium Colour Change is rated for an outdoor durability of up to 10 years. For additional details, please see Arlon's Warranty

▶ Fire certification: Certified for Europe for rail external application in combination with Series 3350 - ▲ Only for flat trucks

● 5 years durability when used in combination with this lamination

INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
			1.52	25	N/A
•	•		1.37 1.52	45.72	★Series 3210 Series 3270 Series 3310 Series 3200 Series 3220 Series 3350
•	•		1.37 1.52	45.72	★Series 3270 ★Series 3210 ★Series 3310 Series 3200 Series 3220 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 ★Series 3350 Series 3200 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420▲ Series 3350

WHEN TO USE FUSION WRAP AND WHEN TO USE ARLON CAST FILMS?

Fusion Wrap

is designed for flat surfaces and many complicated shapes, but excluding deep channels. Fusion Wrap requires a relief cut when applied in deep channels.

High-Performance Cast Films

(Premium Colour Change, SLX+®, SLX™ Cast Wrap, DPF 6100XLP, DPF 6000XRP, DPF 6000RP) are designed for flat and complicated shapes, including the most demanding channels.

Fusion Wrap	Vehicle Type	ARLON Cast Films
✓		✓
✓		✓
✗ Relief Cut Required		✓
✗ Relief Cut Required		✓
✓		✓
✓		✓

TURN THE PAGE FOR MORE
VEHICLE FILM PRODUCTS



Choose your Vinyl

For more product information [click here:](#)







NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS	
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS		TEXTURED
DPF 4600GLX X-Scape TECHNOLOGY	7	P	80	G	●	●		●	LG	●	●	●♣				Flat trucks Cars Passenger vans Buses Trains - Trams
ILLUMINITE WRAP™ FLITE TECHNOLOGY	7	C	125	G	●			●	LG	●	●	●				Cars Passenger vans Buses Trains - Trams
DPF 2400XLP X-Scape TECHNOLOGY	7	C	125	G	●			●	LG	●	●	●				Flat trucks
DPF 2400	7	C	125	G	●				C	●	●					Flat trucks
DPF 8000™ ULTRA TACK WHITE	7	P	90	S	●		●	■	C	●	●			●	●	ABS plastics Off-road vehicles Quads Cross-Bikes Machinery decals
DPF 4550GTX/MTX X-Scape TECHNOLOGY	5	P	70	G/M	●			●	LG	●				●	●	Flat trucks
DPF 4550GT/MT	5	P	70	G/M	●				LG	●				●	●	Flat trucks
DPF 4550G	5	P	70	G	●				C	●				●	●	Flat trucks

♣ Only with lamination Series 3170 - ▲ Only for flat trucks - ● 5 years durability when used in combination with this lamination

■ Available for special order, please refer to your Arlon Business Development Manager - ◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:

INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420▲ Series 3350
•	•		1.22	22.86 45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•	•		1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•	•		1.02◆ 1.24◆ 1.37◆ 1.52◆	45.72◆ 99.94◆	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3310 Series 3350
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420

PRO  TIPS

Types of FILMS

Cast film begins as a liquid called organosol in which Polyvinyl Chloride (PVC) is suspended in a solvent mixture which exists as a liquid at room temperature.

This liquid is run under a knife which determines the thickness of the film and is then cast onto a liner which determines the surface gloss level or texture of the product. Then, the solvents are baked off leaving a solid PVC film behind.

Cast film has never been stressed or stretched, that is why it does not shrink in a way that polymeric/monomeric films do.

WHAT IS X-SCAPE TECHNOLOGY®?

Arlon's brand name for our air-egress technology which allows air to release through tiny channels in the adhesive-backed vinyl used for fleet, vehicle and general signage applications. X-Scape Technology® allows installers to achieve a speedy installation while maintaining a high enough tack to ensure long-term bond.

X-Scape®
TECHNOLOGY

IMAGE GALLERY



SLX+®



SLX™ Cast Wrap By A1 Signs



DPF 6100XLP By Ultimate Car Wraps



DPF 6100XLP By Scholtensing



DPF 6000XRP By Art Graf



DPF 6000XRP



DPF 6000RP By Ei Media Poland



DPF 6000RP With Series 3350 For Rail Applications



Fusion Wrap



Premium Colour Change By NeedForWraps Poland



DPF 4600GLX By XquisitePrint UK



DPF 4600GLX By MovingAds Malta



IllumiNITE Wrap™



DPF 2400XLP



DPF 8000™ ULTRA TACK




DPF 4550GTX/MTX

ARCHITECTURAL RANGE

The Arlon Architectural Range offers products for architects, interior designers and home décor experts. Designers looking for innovative but affordable solutions for renovations will find that Arlon's Architectural Range delivers exceptional quality and requires low maintenance, ultimately ensuring high design impact through versatile products.

The new range of products includes interior and exterior wall films as well as window graphics for residential and commercial projects.

INTERIOR WALLS
EXTERIOR WALLS
WINDOW FILMS
FLOOR FILMS

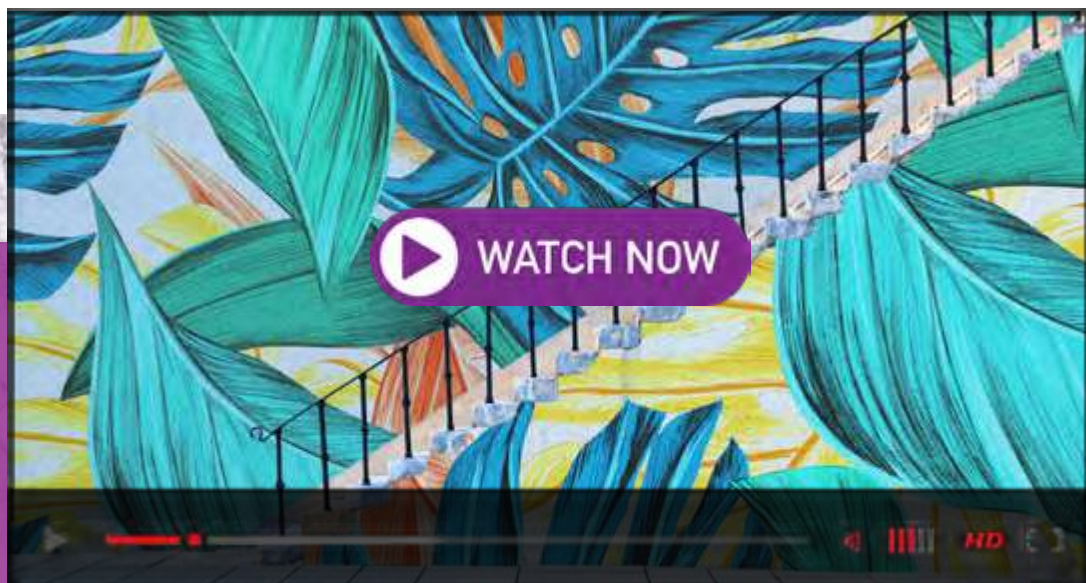

► Video: Arlon Architectural Range



INTERIOR DECOR AND EXTERIOR FACADES REIMAGINED



INTERIOR WALL FILMS

Choose your Vinyl

For more product information [click here:](#)



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES				APPLICATIONS	
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED		LOW ENERGY SURFACES
DPF 4200▼	7	P	150	M/C	●		●			C	●	●	●		Smooth painted/unpainted walls
DPF 4300	4	P	86	M		●	●			C	●				Smooth painted walls
DPF 510 ULTRA TACK	3	M	100	G/M	●					C	●				Smooth painted/unpainted walls Tile Plastic - Metal

▼ Please refer to the Interior Walls Installation Guide




Flat


Painted wall
Unpainted wall
Metal - Plastic

Soft curve


Painted wall
Unpainted wall
Metal - Plastic

INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•		1.37	45.72	N/A
•	•	•	1.37	45.72	★ Series 3350 ★ Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•		•	1.07 1.37 1.52	45.72	★ Series 3510 Series 3170 Series 3420

Painted/
Unpainted wall




Tile



Plastic



Metal



FROM TEXTURED TO SMOOTH, **TRANSFORM YOUR WALLS**

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:

WRAPITRIGHT®
INSTRUCTIONAL VIDEO LIBRARY



WATCH THE VIDEO ▶

Installing Large Interior Wall Graphics

Today, printed interior wall graphics are gradually taking over paint and wallpaper due to their ease of application and removal, customizability and even profitability. In this example, we are installing on a free-standing wall with no ceilings or adjacent walls. This wall is already clean. It is clear of spider webs, removable obstructions and is ready for application. Above all, use the right tools, media, preparation, and application technique. Certainly, this will ensure an efficient, safe, and profitable install. This video will show you how to install large interior wall graphics.

For more videos, visit wrapitright.com

EXTERIOR WALL FILMS

Choose your Vinyl

For more product information click here:



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE						SURFACES				APPLICATIONS
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	
DPF 8000™ ULTRA TACK WHITE	7	P	90	S	●			●	■	C	●	●	●	●	Brick Concrete - Stucco Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200 HIGH TACK	7	P	90	S	●			●		C	●	●	●	●	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200X HIGH TACK <i>X-Scape</i> TECHNOLOGY	7	P	90	S	●			●	●	C	●	●	●	●	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal

■ Available for special order, please refer to your Arlon Business Development Manager - ▲ Only for flat & smooth surfaces
◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length



Textured

Brick - Concrete
Stucco - Wood
Metal - Plastic - Tile




Low Energy

<38 dyne

Painted wall
Plastic

FROM TEXTURED
TO SMOOTH,
**TRANSFORM
YOUR WALLS**

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:

INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•		1.02 ♦ 1.24 ♦ 1.37 ♦ 1.52 ♦	99.94 ♦ 45.72 ♦	★ Series 3220 ★ Series 3420 ▲ Series 3210 Series 3310 Series 3350
•	•		1.37 1.52	45.72	★ Series 3220 ★ Series 3420 ▲ Series 3210 Series 3310 Series 3350
•	•		1.37 1.52	45.72	★ Series 3220 ★ Series 3420 ▲ Series 3210 Series 3310 Series 3350

Brick



Plastic



Concrete




Tile



Stucco




Painted/
Unpainted wall




Wood



Metal



WRAPITRIGHT®
INSTRUCTIONAL VIDEO LIBRARY

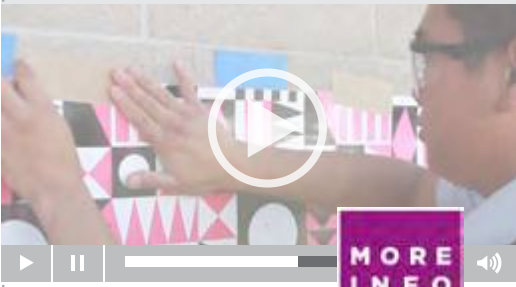

WATCH THE VIDEO ▶

Installing Large Exterior Wall Graphics

Applying exterior wall graphics presents significantly greater challenges than interior walls. Exterior walls present more options in their construction: materials such as concrete, brick, or stucco; textures which range from smooth to extremely textured; and finishes from primed to painted to bare. Digitally printed exterior wall graphics can achieve amazing results that paint simply cannot. So to maintain and improve the appearance of printed wall graphics, wrap it right the first time, on time, every time. This video will show you how to installing large exterior wall graphics.

For more videos, visit wrapitright.com

Choose your Vinyl

For more product information [click here:](#)

MORE INFO

NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS		
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES		INDOOR	OUTDOOR
DPF 5450X	5/3▼	P	80	EG	●				●	C	●				●	●	Windows Glass Mirrors Partitions
SERIES 5400	5/2▼	P	80	M	●					C	●				●	●	Windows Mirrors Partitions
DPF 50WD White	2	P	90	M		●	●			C	●				●	●	Windows Glass Metal - Aluminium
DPF 50WD CLEAR	2/1	P	100	G		●	●			C	●				●	●	Windows Glass Metal - Aluminium
DPF 45WF♣	1	M	150	S			●			C	●				●	●	Windows Glass

▼Years durability for outdoor applications - ♣ One way vision 60/40 perforated pattern - ◆ Optimal printing on HP Latex 360

WHAT IS AN ETCHED GLASS FILM? **DPF 5450X SERIES 5400**

Arlon's Etched Glass vinyl is designed to simulate the look of a fine grain acid etched or a sandblasted glass finish. It eliminates the mess, expense, inconsistency and possible damage to costly glass that these traditional methods can cause.

It may be used on an inner (second surface) or outer layer (first surface) of glass, acrylic or polycarbonate substrates. The most common use is on second-surface applications, as it helps avoid abrasion and damage due to vandalism.

Arlon's Etched Glass vinyl is also preferred when a uniform, high-gloss surface over the entire sign is required.




INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
●	●	●	1.22 1.52	50	N/A
N/A	N/A	N/A	1.22 1.52	50	N/A
●	●	●	1.37	45.72	★Series 3420
●	●		1.37	45.72	★Series 3200 Series 3420
●	●	●◆	1.37 1.52	50	★Series 3200

TRANSFORM
ORDINARY WINDOWS INTO
**PERSONALIZED
ART-TAILORED**

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:

WRAPITRIGHT®
INSTRUCTIONAL VIDEO LIBRARY



WATCH THE VIDEO ▶

Wet Application of a Window Graphic

Using a wet application can help make your project picture perfect. This video demonstrates how to correctly install window graphics with a wet application.

For more videos, visit wrapitright.com




Choose your Vinyl

For more product information [click here:](#)



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS	
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES		INDOOR
DPF 8200 HIGH TACK	7	P	90	S	●			●		C	●	●	●	●	●	Low-pile carpet Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 8000™ ULTRA TACK	7	P	90	S	●			●	■	C	●	●	●	●	●	Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 4600GLX <i>X-Scape</i> TECHNOLOGY	7	P	80	G	●		●		●	LG	●	●	●	●	●	Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510 ULTRA TACK	3	M	100	G/M	●					C	●				●	Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GT/MT	3	M	100	G/M	●					LG	●				●	Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GTR/MTR	3	M	100	G/M		●				LG	●				●	Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo

■ Available for special order, please refer to your Arlon Business Development Manager
 ◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length


INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•		1.37 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•		1.02 ♦ 1.24 ♦ 1.37 ♦ 1.52 ♦	99.94 ♦ 45.72 ♦	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•		1.37 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Matte

QUALITY IS AT THE CORE OF EVERYTHING WE DO -
OUR PRODUCTS REFLECT THIS

YOU MAY ALSO BE INTERESTED IN THE
FOLLOWING:

WRAPITRIGHT®

INSTRUCTIONAL VIDEO LIBRARY

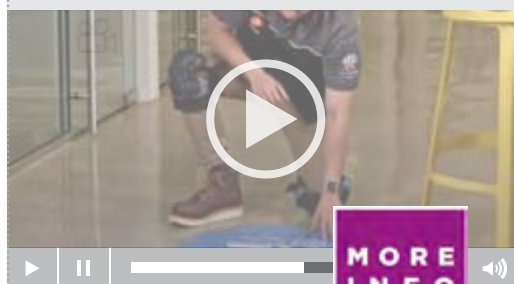

WATCH THE VIDEO ▶

How to Install Floor Graphics

Vinyl floor graphics are a great way to direct traffic, show-off your brand, and promote an event. To learn how to install floor graphics follow along with the steps in this video.

For more videos, visit wrapitright.com



DPF 8200 HIGH TACK

IS PERFECT FOR YOUR LOW-PILE CARPETS



IMAGE GALLERY





Series 5400



DPF 5450X



DPF 50WD
WHITE



DPF 50WD
CLEAR



DPF 45WF



DPF 4600GLX with Series 3220



JOAN
Miró

PAINTING AND

ANTI-PAINTING 1927-19

Choose your Vinyl

For more product information [click here:](#)



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS		
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES		INDOOR	OUTDOOR
DPF 8000™ ULTRA TACK WHITE	7	P	90	S	●			●	■	C	●	●	●	●	●	●	ABS plastic General signage
DPF 8000™ ULTRA TACK CLEAR	7	P	75	L	●			●		C	●	●	●	●	●	●	ABS plastic General signage
DPF 8200X HIGH TACK <i>X-Scape</i> TECHNOLOGY	7	P	90	S	●			●	●	C	●	●	●	●	●	●	General signage Decals
DPF 8200 HIGH TACK	7	P	90	S	●			●		C	●	●	●	●	●	●	General signage Decals
DPF 6000XRP <i>X-Scape</i> TECHNOLOGY	10	C	50	G	●		●		●	LG	●	●	●		●	●	General signage
DPF 6000RP WHITE	10	C	50	G	●		●			LG	●	●	●		●	●	General signage
DPF 6000RP CLEAR	7	C	50	G	●					C	●	●	●		●	●	Backlit signage General signage
DPF 4600GLX <i>X-Scape</i> TECHNOLOGY	7	P	80	G	●				●	LG	●	●			●	●	General signage
DPF 2400	7	C	125	G	●					C	●	●			●	●	General signage

◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

■ Available for special order, please refer to your Arlon Business Development Manager

♣ 1.24 m is only available in 99.94 m roll length, 1.37 m is only available in 45.72 m roll length

▲ Only for flat & smooth surfaces ● 5 years durability when used in combination with this lamination

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:

WRAPITRIGHT®

INSTRUCTIONAL VIDEO LIBRARY



WATCH THE VIDEO ►

Flat Substrate Application

At some point in time, you are going to run into a situation where you are going to have to lay out a large graphic by hand onto a flat substrate. When using the proper tools and air egress vinyl, it is going to make your life so much easier.

The flat substrate used in this demonstration is a big aluminium panel – one of the most aggressive surfaces on which to lay a graphic. Before beginning the application, make sure your graphic is the proper size for your substrate, including a little extra on all edges for trimming. This video shows how you can use air-egress vinyl to make these application projects simple and consistent.

For more videos, visit wrapitright.com

TURN THE
PAGE FOR MORE
**COMMERCIAL
FILM
PRODUCTS**



INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•		1.02 ♦ 1.24 ♦ 1.37 ♦ 1.52 ♦	99.94 ♦ 45.72 ♦	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3310 Series 3350
•	•	•	1.24 ♣ 1.37 ♣	99.94 ♣ 45.72 ♣	★Series 3200
•	•		1.37 1.52	45.72	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3310 Series 3350
•	•		1.37 1.52	45.72	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3310 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 ★Series 3350 Series 3200 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420 ▲ Series 3350
•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310

Choose your Vinyl


For more product information [click here:](#)



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			ADHESIVE					SURFACES					APPLICATIONS		
		TYPE	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES		INDOOR	OUTDOOR
DPF 4550GTX/MTX X-Scape TECHNOLOGY	5	P	70	G/M	●				●	LG	●				●	●	General signage
DPF 4550GT/MT	5	P	70	G/M	●					LG	●				●	●	General signage
DPF 4550G	5	P	70	G	●					C	●				●	●	General signage
DPF 5450X	5/3▼	P	80	EG	●				●	C	●				●	●	Display window
DPF 4300	4	P	86	M		●	●			C	●				●	●	General signage Medium-term signage Decals
DPF 510 ULTRA TACK	3	M	100	G/M	●			●		C LG	●				●	●	Short-term signage POP display Kiosk
DPF 510G/M	3	M	100	G/M	●					C	●				●	●	Medium-term signage POP display Kiosk Real estate signage
DPF 510GT/MT	3	M	100	G/M	●					LG	●				●	●	Medium-term signage POP display Kiosk Real estate signage
DPF 510GTR/MTR	3	M	100	G/M		●				LG	●				●	●	Short-term signage POP display Kiosk

▼Years durability for outdoor applications

INK			SIZE		RECOMMENDED OVERLAMINATES
SOLVENTS	UV	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.22 1.52	50	N/A
•	•	•	1.37	45.72	★Series 3350 ★Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•	•	•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420

PRO  TIPS

Types of FILMS

Polymeric and monomeric films are perfect for short-term and medium-term graphics including temporary signage, indoor graphics and billboards.



IMAGE GALLERY



DPF 8000™ ULTRA
TACK WHITE



DPF 8000™ ULTRA
TACK CLEAR



DPF 8200X HIGH TACK



DPF 6000XRP



DPF 6000RP WHITE



DPF 6000RP CLEAR



DPF 4600GLX



DPF 2400



DPF 4550
GTX/MTX



DPF 5450X



DPF 4300



DPF 510GT/MT

Choose your Overlaminates

For more product information [click here:](#)



NAME	DURABILITY UNPRINTED (IN YEARS)	FILM			RELEASE LINER	SIZE		RECOMMENDED VINYL								
		TYPE	THICKNESS (IN MICRONS)	FINISH		ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	SLX*	SLX™ CAST WRAP	DPF 6100XLP	DPF 6000XRP	DPF 6000RP WHITE	DPF 6000RP CLEAR	FUSION WRAP	DPF 4600GLX	
SERIES 3170	7	C	35	G	Clay Coated	1.37 1.52	45.72								★	★
SERIES 3200	7	C	50	G	Clear Synthetic	1.37 1.52	45.72	•	•	•	•	•	★	•	•	•
SERIES 3210	7	C	35	G	Clay Coated	1.22 1.37 1.52	45.72	★	★	★	★	★	•	•	•	•
SERIES 3220	7	C	50	G/M	Clay Coated	1.22▼ 1.37 1.52	45.72	•	•	★	★	★	•	•	•	•
SERIES 3270	7	C	50	G/M	Clay Coated	1.37 1.52	45.72	•	★	•	•	•	•	•	•	•
SERIES 3310 *	10	PU	38	G	Clay Coated	1.37 1.52	45.72	•	★	★	★	★	•	•	•	•
SERIES 3420	5	P	75	G/M/S	Clay Coated	1.07▼ 1.37 1.52	45.72							•▲	•▲	•▲
SERIES 3450	5	P	80	G/M	Clay Coated	1.07▼ 1.37 1.52	50									
SERIES 3510	3	M	80	G/M	Polycoated Kraft	1.37 1.52	45.72									
SERIES 3350 ANTI-GRAFFITI ▶	10	PVDF	50	S	Lay-Flat Polycoated	1.37	45.72	•	•	•	•	★		•	•	•
PROTEC SERIES 3960	2	M	305	G	Clear Synthetic	1.37	22.86									

★ : Recommended overlaminates: Recommended to use for primary application
 • : Compatible overlaminates: Can be used as a secondary or alternative application
 ▼ Only available in Gloss Finish - Environmentally Friendly - * Recommended for fleet and vehicle applications
 ▲ Only for flat surfaces - • 5 years durability when used in combination with this lamination - ▶ Compatible with all Arlon vinyl films used only for flat & smooth surfaces applications

ARLON OVERLAMINATES ARE DESIGNED TO **PROTECT & PROLONG THE LIFE OF YOUR GRAPHIC**

PRO TIPS

Types of OVERLAMINATES


The overlaminates must be the same or higher quality than the digital film.
 If you choose a cast vinyl, choose a cast lamination. Your work will be protected in the best way.

ILLUMINITE WRAP™	DPF 2400XLP	DPF 2400	DPF 8000 ULTRA TACK WHITE	DPF 4550GTX/MTX	DPF 4550GT/MT	DPF 4550G	DPF 4500	DPF 510 ULTRA TACK	DPF 8200 HIGH TACK	DPF 8200X HIGH TACK	DPF 50WD WHITE	DPF 50WD CLEAR	DPF 45WF	DPF 510G/M	DPF 8000 ULTRA TACK CLEAR	DPF 510GTR/MTR	DPF 510GT/MT
				•	•	•	•	•						•		•	•
★	★	★		•	•	•						★	★		★		
★	★	★	•	•	•	•	•		•	•							
★	★	★	★	•	•	•	•		★	★							
•	•	•															
•	•	•	•	•	•	•	•		•	•							
			★ ▲	•	•	•	★	•	★ ▲	★ ▲	★	•		•		•	•
				★	★	★											
								★						★		★	★
			•	•	•	•	★		•	•							
			★						★	★							

OUR OVERLAMINATES HAVE THE FEATURES YOU ARE LOOKING FOR



Ease of Application



UV Stability



Abrasion Resistance



Clarity



Temperature & Chemical Resistance



Prolonged Durability

ROAD TO WRAP

POWERED BY ARLON

YOUR ROAD TO SUCCESSFUL APPLICATIONS

Road to Wrap, created by Arlon Europe Technical Team, is an inspirational series giving authentic behind-the-scenes insights and discuss trending industry topics.



The videos feature tutorials given by best-in-class installers with many years of experience in the wrapping industry. Exclusive motivational content like personal stories, training and unrevealed experiences are now shared with you.



CLICK TO WATCH
ALL EPISODES



AVAILABLE ON YOUTUBE



ARLON GRAPHICS

ARLON PRINT PROFILE CENTER

COLOR BASE

OVER 30,000 ICC PROFILES

WHY COLOR PROFILES?

- ▶ A profile is essential to optimize the match between printer and material
- ▶ A profile assures that you obtain the highest quality from your printer and material
- ▶ The possibility of false prints is minimal allowing you to save on ink and media usage

FOR MORE INFO VISIT

aron.color-base.com

OR CLICK
HERE



MORE
INFO



SUBMIT YOUR WORK

Have you worked with our films and print media? Share your work done with Arlon products with us, with the world!

Take photos and/or record videos and submit the media by using the form available at:

arlon.com/submit-your-work

MORE
INFO

EUROPE - AFRICA - MIDDLE EAST

a Dr. Lelykade 22B, 2583CM Den Haag, The Netherlands

p +31 70 354 4311

f +31 70 355 7721

USA

a 200 Boysenberry Lane, Placentia, CA 92870

p 800 232 7161 / +1 714 985 6300

f +1 714 985 6305

CHINA

a No. 1989 Xinchang Road, Weifang, Shandong, 262400

p +86 0536 6226568